


C-6 Solenoid Specifications

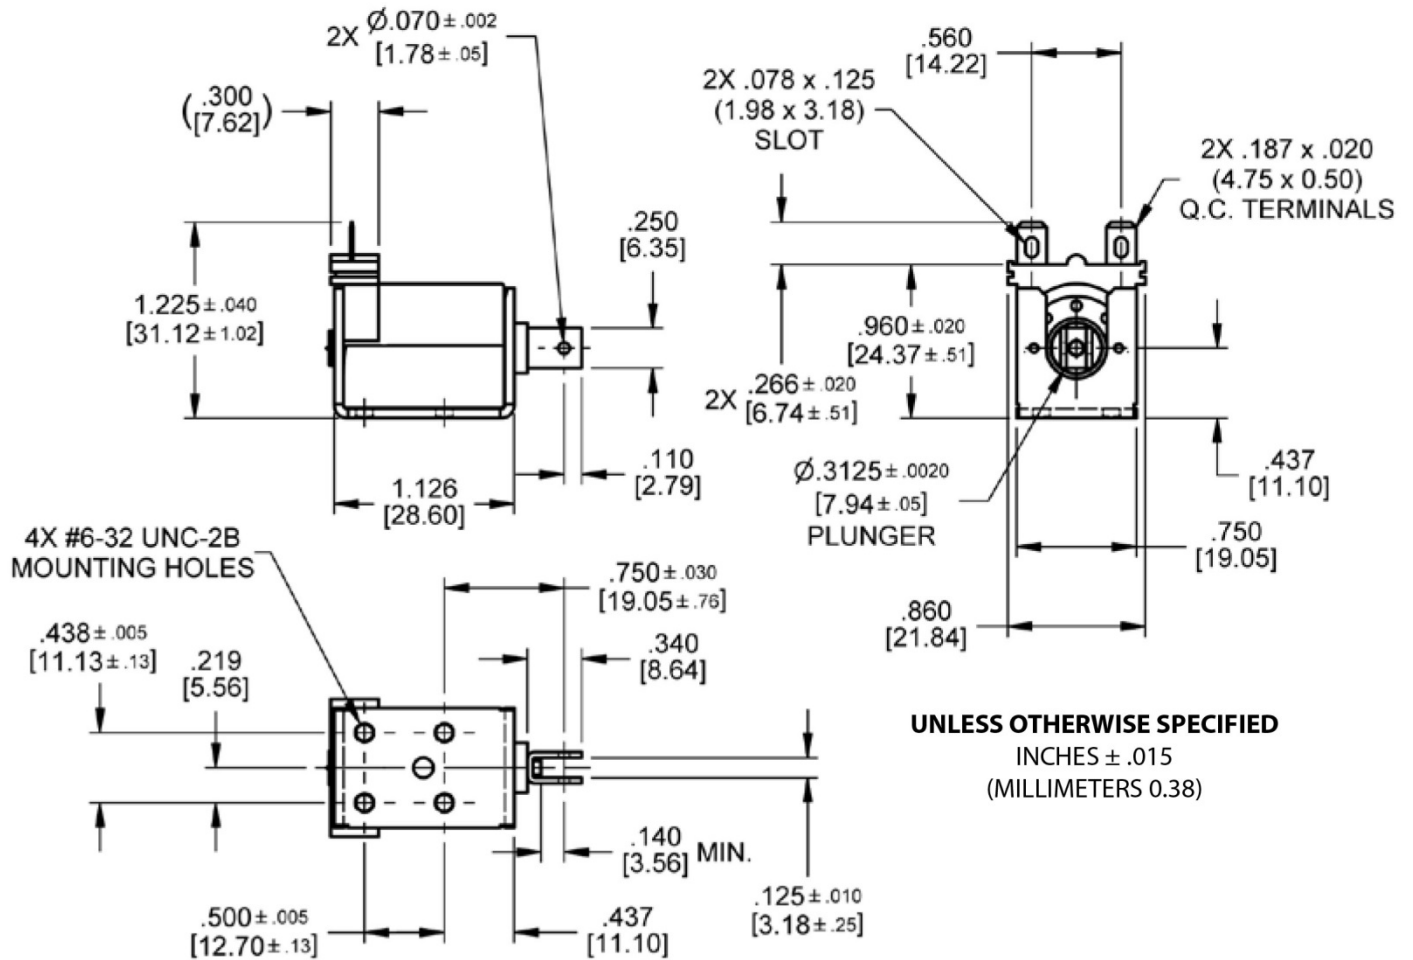

Part #	Deltrol #	Voltage	Duty Cycle	Power	Resistance Ohms	Operation	Plunger Seat	Stroke	Typical Force, 100% Voltage, 77°F, Stroke @			
									.000"	.125"	.250"	.500"
1734	53685-81	12VDC	Continuous	4.7W	30.6	Pull	Conical	.500"	38oz.	4oz.	1.9oz.	.5oz.
1926	53686-81	12VDC	Intermittent	12W	13	Pull	Conical	.500"	50oz.	11oz.	5oz.	2oz.
1577	53685-83	24VDC	Continuous	4.7W	124	Pull	Conical	.500"	38oz.	4oz.	1.9oz.	.5oz.
1723	53686-83	24VDC	Intermittent	12W	50.8	Pull	Conical	.500"	50oz.	11oz.	5oz.	2oz.
1575	53687-94	120VAC	Continuous	6.8VA	776	Pull	Flat	.500"	33oz.	5.9oz.	4oz.	2oz.
1582	53688-94	12VDC	Intermittent	19.6VA	327	Pull	Flat	.500"	57oz.	13oz.	9oz.	4.5oz.

2023 Solenoid Prices

Quantity	1-10	11-25	26-50	51-100	101-250	251-500	500+
Price / Piece	\$49.00	\$41.00	\$36.00	\$32.07	\$30.79	\$29.50	\$27.90